


(FIG 1)

PSD18/PSD25

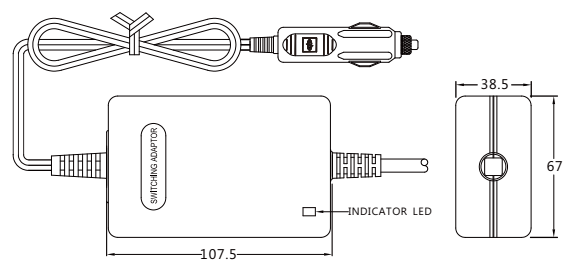

(FIG 2)

PSD40

■ PSD18 18W DC TO DC series (FIG 1)

Model name	Input Voltage(VDC)	Output Voltage(VDC)	Output Current(A)	Max.Output power(W)
PSD18-1-I	36~72	5~6	3.00~2.50	15
PSD18-1-1-I	36~72	6~8	2.50~1.88	15
PSD18-2-I	36~72	8~11	2.25~1.64	18
PSD18-3-I	36~72	11~13	1.64~1.38	18
PSD18-4-I	36~72	13~16	1.38~1.13	18
PSD18-5-I	36~72	16~21	1.13~0.86	18
PSD18-6-I	36~72	21~27	0.86~0.67	18
PSD18-7-I	36~72	27~33	0.67~0.55	18

Weight: Approx 150~250gs

■ PSD25 18W DC TO DC series (FIG 1)

Model name	Input Voltage(VDC)	Output Voltage(VDC)	Output Current(A)	Max.Output power(W)
PSD25-0-I	12~26	3~5	3.33~2.00	10
PSD25-1-I	12~26	5~6	2.70~2.25	13.5
PSD25-1-1-I	12~26	6~8	2.40~1.80	14.4
PSD25-2-I	12~26	8~11	2.13~1.55	17.1
PSD25-3-I	12~26	11~13	1.55~1.38	18
PSD25-4-I	12~26	13~16	1.38~1.12	18
PSD25-5-I	12~26	16~21	1.12~0.85	18
PSD25-6-I	12~26	21~27	0.85~0.66	18
PSD25-7-I	12~26	27~33	0.66~0.54	18
PSD25-8-I	12~26	33~48	0.54~0.37	18

Weight: Approx 150~250gs

■ PSD40 36W DC TO DC series (FIG 2)

Model name	Input Voltage(VDC)	Output Voltage(VDC)	Output Current(A)	Max.Output power(W)
PSD40-0-I	12~26	3~5	5.00~3.00	15
PSD40-1-I	12~26	5~6	4.50~3.75	22.5
PSD40-1-1-I	12~26	6~8	5.00~3.75	30
PSD40-2-I	12~26	8~11	4.27~3.10	34.2
PSD40-3-I	12~26	11~13	3.27~2.76	36
PSD40-4-I	12~26	13~16	2.76~2.25	36
PSD40-5-I	12~26	16~21	2.25~1.71	36
PSD40-6-I	12~26	21~27	1.71~1.33	36
PSD40-7-I	12~26	27~33	1.33~1.09	36
PSD40-8-I	12~26	33~48	0.75~0.75	36

Weight: Approx 200~250gs

Note:Optional output connectors (See appendix A)